EE-F9M

2 Post Lift




Features

- Base lift recommended where low ceilings are applicable, or vehicles have very high roofs or roll bars
- Single sided manual release system
- Aluminium motor pump with control box, isolator switch and low voltage 24V control circuit
- Door protection pads
- Arms lock automatically when raised
- Pads adjust telescopically from 95mm to 160mm (floor height)
- CE Certified by SGS UK
- In the event of a power failure, lift can be lowered without using electrical power
- Ceiling height required for installation 3067mm

Technical Data

Lifting Capacity	Maximum Lifting Height	Lifting Time	Lift width	Motor	Rated Oil Pressure	Packaging Dimensions:
3500Kg	1900mm	55s	3420mm	220 V 2.2kW	22Mpa	3000x580x750mm (715Kg) 850x300x350mm (30Kg)

HIGHVELD
Garage Equipment CC
CK 85/005300/23

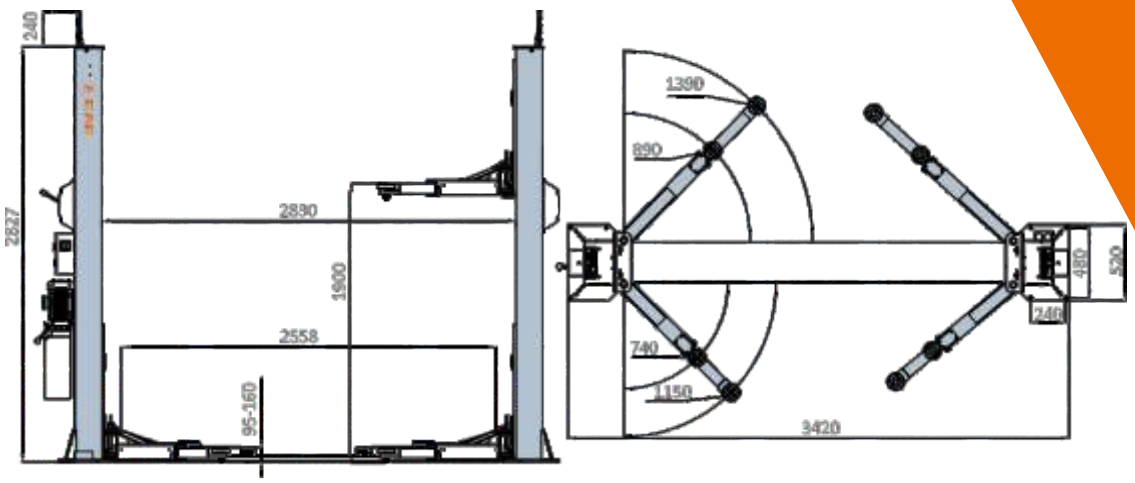



Adjustable lifting pad suitable for low and 4x4 vehicles



Single side safety lock release lever for ease of use



Strong carriage and arm structure with automatic arms lock and unlocking.



Low voltage 24V system with control box.

E-MAIL info@hge.co.za
WEBSITE www.hge.co.za
TEL 012 330 0540