Peak - KHL4000A

4 - Post Lift - Alignment



Features

- Single phase 230V power supply
- Mechanically operated safety locks
- Dual independent safety system
- Diamond finished platform top to ensure traction at all times
- Long approach ramps makes lift suited for very low ground clearance vehicles
- High quality powder coat finish ensures professional long lasting shine
- Lifting cables and safety releases are all enclosed to improve operation and external appearance
- Single cylinder design improves durability and reduce maintenance cost
- Can be used as parking lift to store vehicles for long periods
- Multi level adjustable locking system ease use as parking lift and ensures level operation
- No air connection required
- Adjustable turntable spacers to accommodate various sizes


HIGHVELD
Garage Equipment CC
CK 85/005300/23




Hidden safety locks with manual safety point release



PEAK-J6A - Auxiliary jack for lifting vehicle wheels off platforms
(Optional)

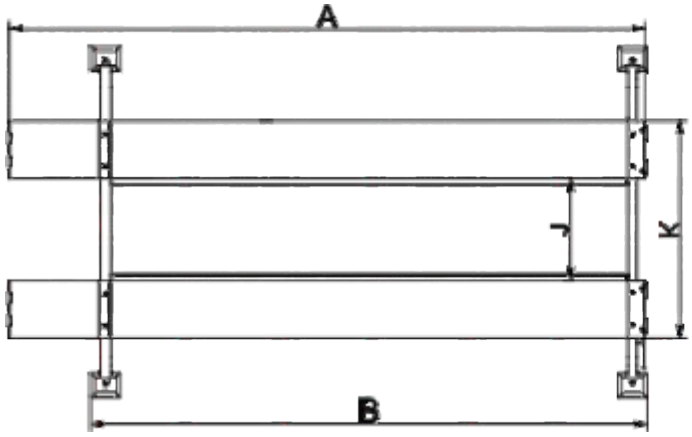

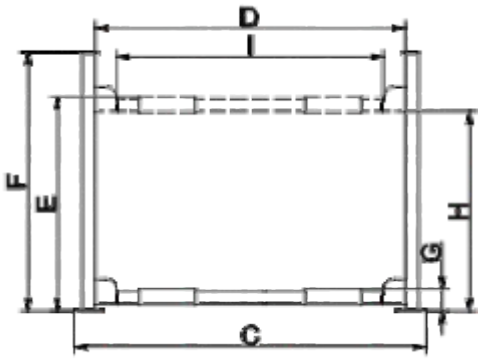

A - 5512mm
B - 4600mm
C - 3206mm
D - 2846mm

E - 1800mm
F - 2105mm
G - 155mm
H - 1660mm

I - 2498mm
J - 1077mm
K - 2093mm

Technical Data

Lifting capacity	4000 kg
Lifting time	45 sec
Lifting height	1800 mm
Length(no ramps)	4600 mm
Width	3206 mm
Motor	2.2KW; 220V
Packing dimensions lift	4640 x 560 x 790 mm
Packing dimensions motor	850 x 300 x 350 mm
Gross Weight	883 kg

E-MAIL info@hge.co.za
WEBSITE www.hge.co.za
TEL 012 330 0540
FAX 012 330 0860